

LOCKS DOWN YOUR ROOF



PRODUCT DESCRIPTION & FEATURES

The Saflok 410® concealed fix roofing system is an interlocking trapezoidal rib profile that can be rolled on site in lengths of up to 120 metres. The minimum roof pitch when using Saflok 410® is 2° on steel and 3° on timber.

Saflok 410® may be rolled in Aluminium - Zinc coated steel (resin coated or colour coated), Galvanized coated steel (resin coated or colour coated) or Aluminium (mill finish or colour coated).

Saflok 410® can be curved or bullnosed to a minimum internal radius of 450mm. Reverse cranking is not possible.

Further literature may be found at www.safintra.co.za.

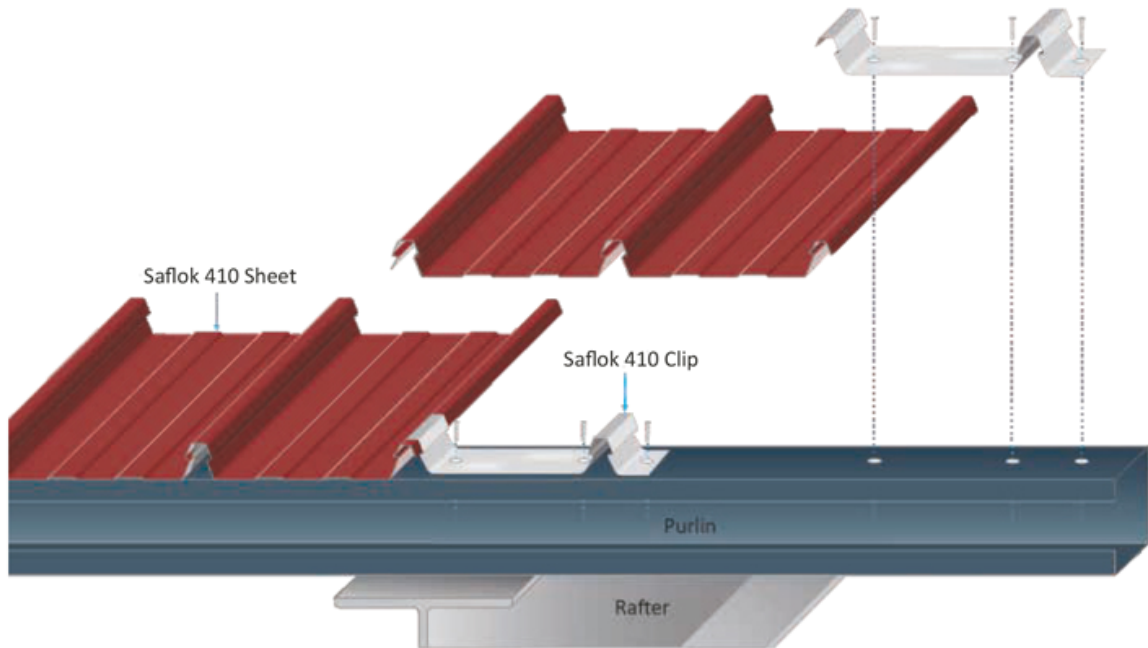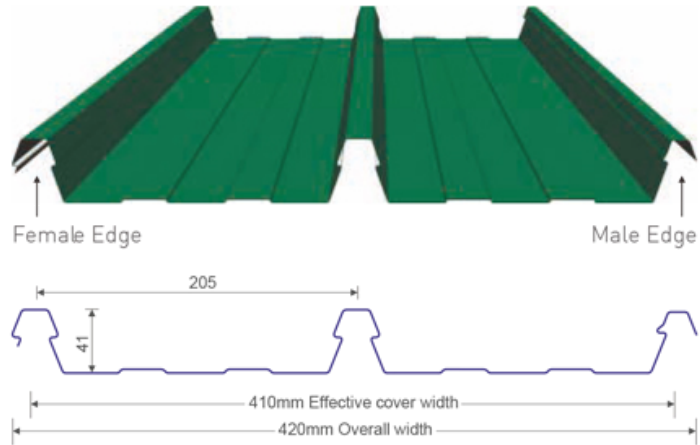

SAFLOK 410 CLIP



The fully interlocking Saflok 410® clip incorporates one anchor to clasp the middle rib and a dual action gooseneck to positively hold down the male-female joint.

