


WIDER COVER WIDTH FOR COST EFFECTIVENESS

PRODUCT DESCRIPTION & FEATURES

Widedek® is an angular trapezoidal fluted profile and is similar in appearance to Tufdek® IBR profiled sheeting, the difference being a wider cover width, and shallower flutes. Widedek® sheeting has a cover width of 760mm and the depth of the flutes on Widedek® are 29mm.

- The Widedek® profile has a better cover width than Tufdek® IBR, resulting in a material cost saving of $\pm 10\%$.
- To achieve the same coverage, less sheets are required to be erected thus saving on time and labour.
- The advantage of using Widedek® instead of a corrugated profile is its strength. The spanning capacity of Widedek® is greater than the corrugated profile thus requiring less purlins, resulting in a further cost saving in material and installment cost.
- Widedek® can be factory cranked, curved and bullnosed to a wide range of radii. For further details refer to page 18 of this manual or contact the Safintra Technical Department.

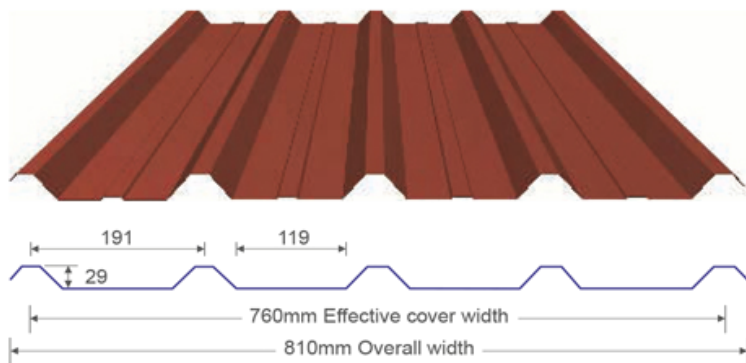

LENGTHS & ROOF PITCH

Widedek® sheeting can be ordered in any length, subject to transport limitations, up to 13,2m. Longer lengths require special transport arrangements.

When using Widedek® sheeting the recommended minimum pitch for roof slopes in excess of 15m is 10° and for slopes less than 15m is 7.5° .

